



AMERICAN-Standard

KITCHEN products



catalogue KP52

specifications of  
**AMERICAN-Standard cabinets**

**CONSTRUCTION** American-Standard cabinets are constructed from combinations of 16, 18, 20, 22, and 24 gauge furniture steel.

**SOUND-DEADENING** Door and drawer fronts are  $\frac{3}{4}$ " thick and sound-deadened. They close on rubber bumpers. Doors and drawer fronts are full size, presenting an unbroken, modern appearance without exposed stiles.

**HANDLES** Handles are streamlined, of modern design and heavily chrome-plated.

**WALL CABINET SHELVES** Shelves in all wall cabinets are adjustable on 1" centers except in AWC 5430 U.

**BASE CABINET SHELVES** All shelves in base cabinets are of the sliding type. The slides fastened to the edge of the shelf are 24 gauge, lead-covered steel (terne plate) sliding on 16 gauge lead-covered steel (terne plate) guides for long wear and easy, silent operation.

**HINGES** Hinges are concealed and are mortised into the cabinet supporting column. Doors open 105 degrees with pivot action.

**HANGER BRACKETS** Hanger brackets, furnished with all wall cabinets, are made of 18 gauge steel, punched on 1" centers for easy mounting.

**RUST RESISTING TREATMENT** All cabinets are Bonderized for rust resistance.

**FINISH** The finish is the highest quality synthetic enamel applied immediately after the steel is treated for rust resistance and baked at the temperature prescribed by the enamel manufacturer, giving cabinets a durable, glossy white finish.

**CONVERTIBILITY** All American-Standard undersink and base cabinets (except ASC 42x25 A and ACD 27) are convertible, so that the position of shelves, concealed drawers, and exposed drawers may be interchanged easily. The doors may be removed from base cabinets, guides installed and drawers inserted, or vice versa. (See pages 27 and 28.)

**SUB-BASES** Sub-bases are recessed 4" for toe space.

**CATCHES** Catches are silent and positive.

(All specifications in this catalog are subject to change without notice.)

## contents

### cabinet specifications

base cabinets

2

wall cabinets

4

utility cabinets

5

undersink cabinets

6

sink fronts

9

cabinet dimensions

10

cabinet accessories

12

maple counter tops

13

disposer

14

ventilator

15

cabinet fillers

16

sink moulding strips

16

vinyl counter tops

16

sink selection guide

17

Royal Hostess cast iron sinks

18

porcelain enameled steel sinks

20

cast iron flat rim sinks

21

sink fittings

22

porcelain enameled steel flat rim sinks

23

Utility Hostess cast iron sinks

24

kitchenette

25

convertibility

27

color in the kitchen

29





## base cabinets

### Key to catalog numbers:

All American-Standard Base Cabinets are identified by a combination of letters and numbers. The letters AD and ACD designate the type of base cabinet. The number indicates the cabinet width (in inches) measured horizontally along the wall. Therefore, ACD 15 identifies the 15" wide American-Standard Cupboard and Drawer Base Cabinet. AD 18 identifies an 18" wide all-drawer base cabinet. R.H. indicates hinge

#### ACD Cupboard and Drawer Base Cabinets (Single Door)

Consists of one 6" deep drawer and cupboard below containing one sliding shelf.

ACD 15 R.H.  
ACD 15 L.H.  
ACD 18 R.H.  
ACD 18 L.H.

#### ACD Cupboard and Drawer Base Cabinets (One Drawer and Two Doors)

Consists of one 6" deep drawer and two-door cupboard below containing one sliding shelf.

ACD 21  
ACD 24  
ACD 27



#### ACD Cupboard and Drawer Base Cabinets

Consists of two 6" deep drawers with cupboards below. Each cupboard contains one sliding shelf.

ACD 30  
ACD 36



#### ACD Cupboard and Drawer Base Cabinets

Consists of two 6" deep drawers with a two door cupboard below each drawer. Each cupboard contains one sliding shelf.

ACD 42  
ACD 48

on right. L.H. indicates hinge on left. Please specify when ordering. American-Standard Base Cabinets are all 24½ inches deep and 34½ inches high.

Storage facilities in base and undersink cabinets (except ASC 42 x 25 A) can be easily changed. Sliding shelves, shallow concealed drawers, and deep concealed drawers can be ordered separately. All sliding shelves and drawers fit the same drawer guides.



#### AD Drawer Base Cabinets

Consists of two 6" deep drawers with a single door cupboard below the left-hand 6" deep drawer and two 12" deep drawers below the right-hand 6" deep drawer. Cupboard contains one sliding shelf.

AD 30  
AD 36



#### AD Drawer Base Cabinets

Consists of two 6" deep drawers with a two door cupboard at the left and two 12" drawers at the right. Cupboard contains one sliding shelf.

AD 42  
AD 48



#### AD Drawer Base Cabinets

Consists of one 6" deep drawer with two 12" deep drawers below.

AD 15  
AD 18  
AD 21  
AD 24



#### ACBC Corner Base Cabinets

Consists of two full-length doors, hinged at center, and one welded-in shelf. Can be used for right or left-hand access as desired. Minimum exposed space required is 13". Installation is made by exposing one-half of cabinet plus 1".

ACBC 24  
ACBC 30  
ACBC 36





## wall cabinets

### Key to catalog numbers:

All American-Standard Wall Cabinets are identified by a combination of letters and numbers. AWC designates an American-Standard Wall Cabinet. The first two numbers indicate the wall cabinet width (in inches) measuring horizontally along the wall. The last two numbers indicate the cabinet height (in inches) from top to bottom. Therefore, AWC 2130 identifies American-Standard Wall Cabinet 21" wide by 30" high. R.H. indicates hinge on right. L.H. indicates hinge on left. Please specify when ordering. All American-Standard Wall Cabinets are 13 $\frac{1}{4}$ " deep. Shelves are 12" deep to accommodate large size dinner plates.

### AWC 30" high Single Door Wall Cabinets

Cabinet contains two shelves, adjustable on 1" centers. Built with a flange at top of back for hanging with special wall bracket which is included.

AWC 1530 R.H.

AWC 1530 L.H.

AWC 1830 R.H.

AWC 1830 L.H.

### AWC 30" high Double Door Wall Cabinets

Cabinet contains two shelves, adjustable on 1" centers. Cabinet is built with a flange at top of back for hanging with special wall bracket which is included.

AWC 2130

AWC 2430

AWC 2730

AWC 3030

AWC 3630

### AWC 15" high Double Door Wall Cabinets

Designed for use over refrigerators, ranges or sinks where more headroom is necessary. Cabinet contains one shelf, adjustable on 1" centers. Cabinet is built with a flange at top of back for hanging with special wall bracket which is included.

AWC 3615

### AWC 18" high Double Door Wall Cabinets

Designed for use over refrigerators, ranges or sinks, where more headroom is necessary. Each cabinet contains one shelf, adjustable on 1" centers. Cabinet is built with a flange at top of back for hanging with special wall bracket which is included.


AWC 2118

AWC 2418

AWC 3018

AWC 3618

AWC 4218

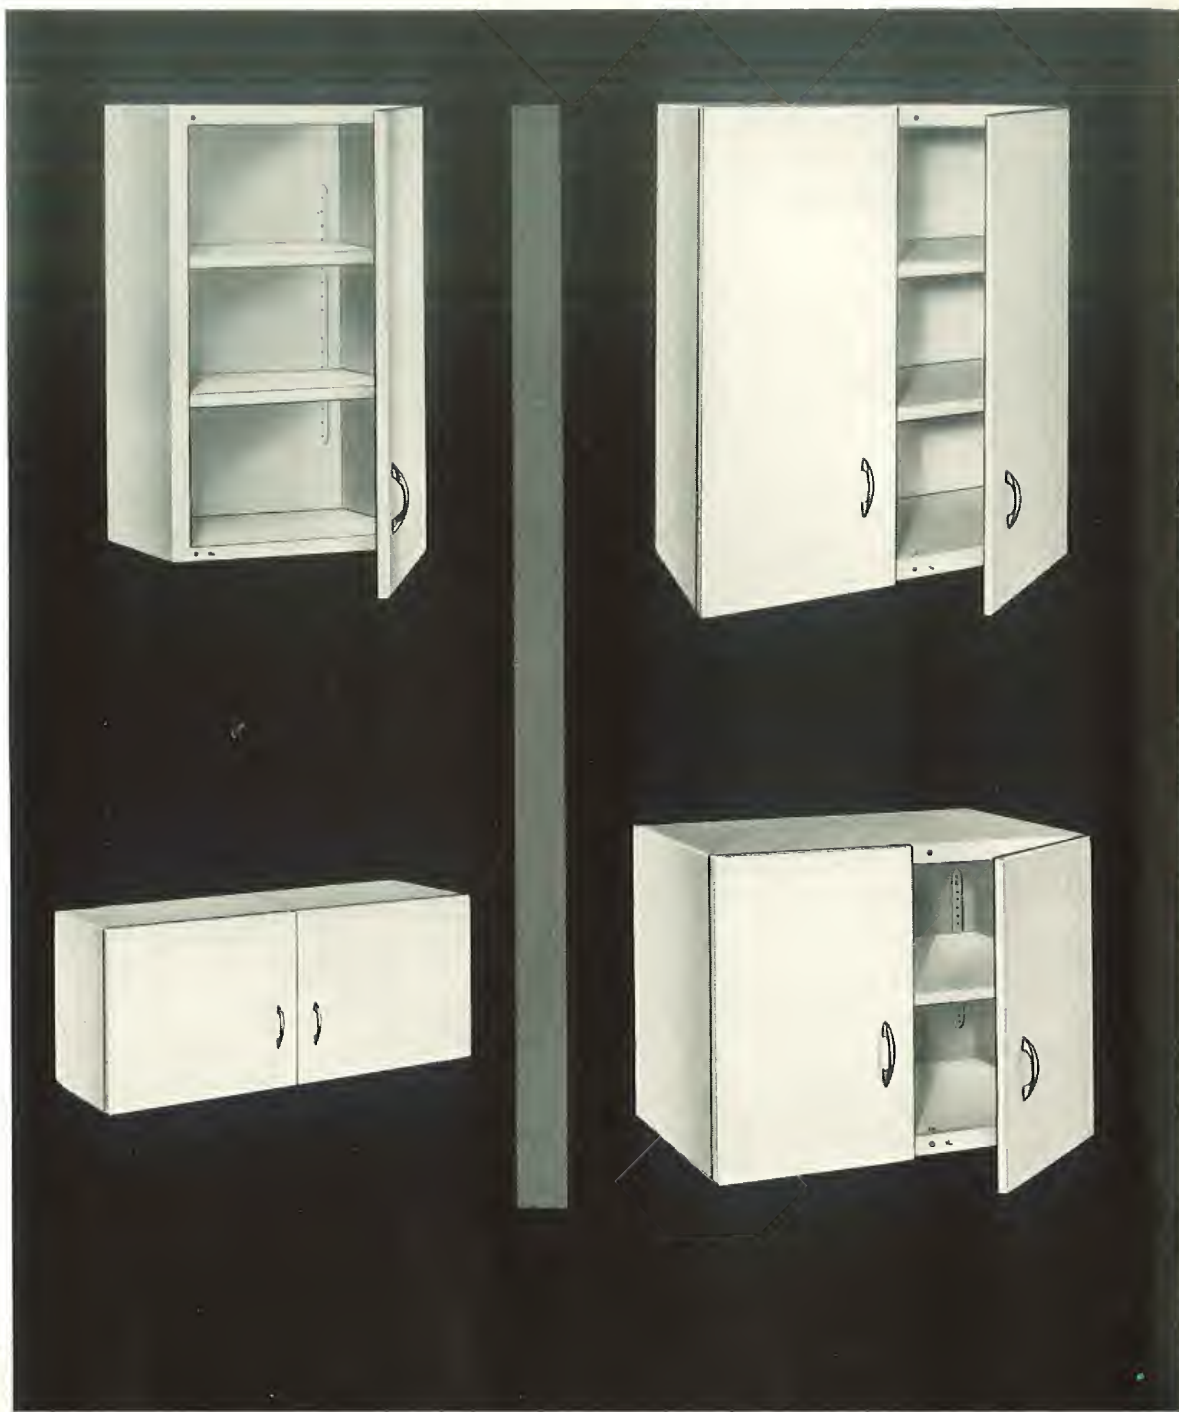

## utility cabinets



### ACWC 30" high Corner Wall Cabinet

Cabinet contains two shelves, adjustable on 1" centers. Built with flange at top of back for hanging with wall bracket. Wall bracket included. A corner space of  $25\frac{3}{4}" \times 25\frac{3}{4}"$  is required for installation.



ACWC 25 $\frac{3}{4}$  R.H. ACWC 25 $\frac{3}{4}$  L.H.



### One-Piece Wall Cabinet with Utility Shelf

The one-piece wall cabinet has two full length shelves welded in place. They are not adjustable. The back splash and 6" utility shelf are also welded in place and are an integral part of the cabinet unit. Each cabinet is supplied with a one-piece, full length hanger bracket.

AWC 5430 U

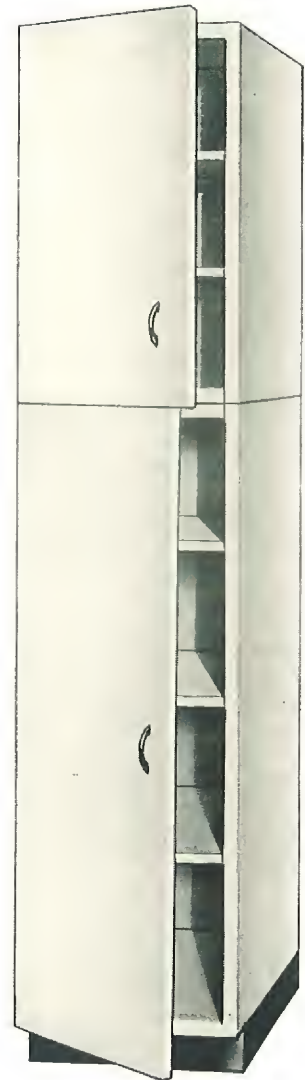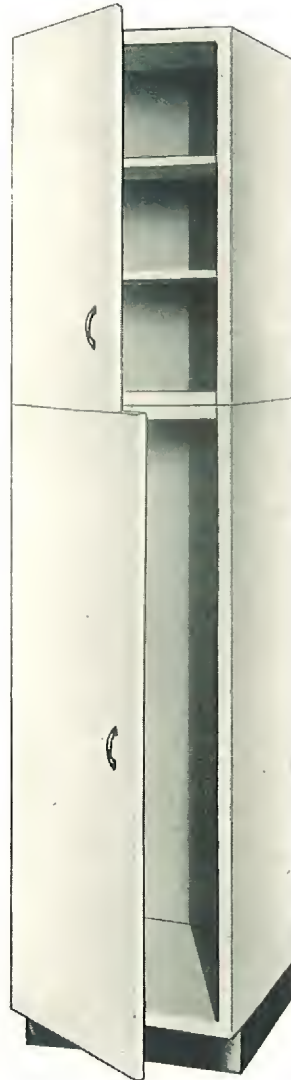

Broom and linen cabinets are made 84" high, including a 4" sub-base. Broom cabinets have two shelves, adjustable on 1" centers. Offers storage space for brooms, vacuum cleaner and mops. Hangers are installed for dust cloths. Upper and lower doors for convenience and easy access. Available in 18" width only but in two depths, 13 $\frac{1}{4}"$  or 24 $\frac{1}{2}"$ . Doors hinged left or right. (Specify when ordering.)

AUC 13 L.H.  
AUC 13 R.H.

AUC 24 L.H.  
AUC 24 R.H.

To convert broom cabinet to linen cabinet, order—

AUC 13 Shelves  
AUC 24 Shelves

These shelves come packed in sets of three. Linen cabinet will then have five adjustable shelves, on 1" centers and a permanent bottom shelf for storage purposes.





## undersink cabinets

### Key to catalog numbers:

All American-Standard Undersink Cabinets are identified by a combination of letters and numbers. The letters ASC designate an American-Standard Undersink Cabinet. The first two numbers indicate the width of the undersink cabinet (in inches) measuring horizontally along the wall. The last two numbers indicate the depth of the under-

#### ASC 42x25 A

This cabinet is for use with double compartment sinks and sink and tray combinations. An ideal low-priced cabinet for use with left or right-hand drainboard sinks. ASC 42x25 A has a two door cupboard providing ample storage space. It has no drawers or shelves and none can be added. Recessed front.

#### ASC 42x25 (Standard)

ASC 42x25 is made for left or right-hand drainboard sinks. Specify when ordering. Contains one 6" deep drawer. Single door cupboard below drawer. Double door cupboard under the sink. Recessed front. Designed for low-priced installations.

#### ASC 42x25 C (Regular)

Made for left or right-hand drainboard sinks. Specify when ordering. Contains one 6" deep drawer with cutlery divider and linoleum bottom. Single door cupboard has a sliding shelf. Double door compartment below sink with wire utility basket mounted on the inside of one door. Recessed front.

Also available in 22" undersink cabinet ASC 42x22 C (R.H. or L.H.) for use with 22" Utility Hostess sink and drainboard.

#### ASC 42x25 D (Deluxe)

This deluxe unit has one 6" deep drawer with cutlery divider and linoleum bottom. Two large 12" deep exposed drawers. The undersink compartment has two doors with a wire utility basket installed on the inside of the left-hand door. Made for left or right-hand drainboard sinks. Specify when ordering. Recessed front.





sink cabinet from front to back. Therefore, ASC 54 x 25 identifies an American-Standard Undersink Cabinet which is 54" wide and 25" deep.

All undersink cabinets illustrated are 24½" deep. Also available are 22" deep undersink cabinets in the following widths: 60", 54", and 42".

All American-Standard Undersink Cabinets are 34½" high.

The ASC 54x25 (Standard) cabinet has two 6" deep drawers with single door cupboards below each drawer. The undersink compartment has two doors with recessed front. Designed for low-priced installations.



**ASC 54x25 (Standard)**



**ASC 54x25 C (Regular)**


Consists of two 6" deep drawers with a single door cupboard below each drawer. The undersink compartment has two doors with recessed front. One 6" deep drawer contains a cutlery divider and linoleum bottom. The single door cupboards each contain one sliding shelf. A wire utility basket is installed on the inside of one undersink compartment door.

Also available in 22" undersink cabinet ASC 54x22 C for use with 22" Utility Hostess sink with double drainboard.

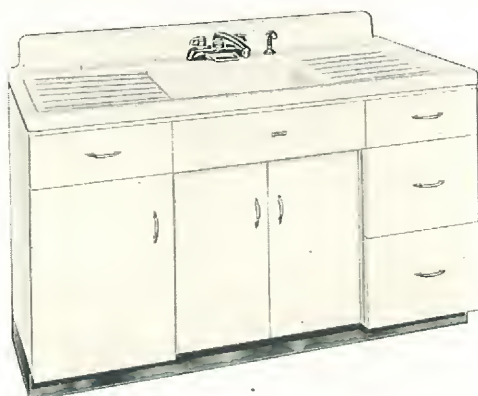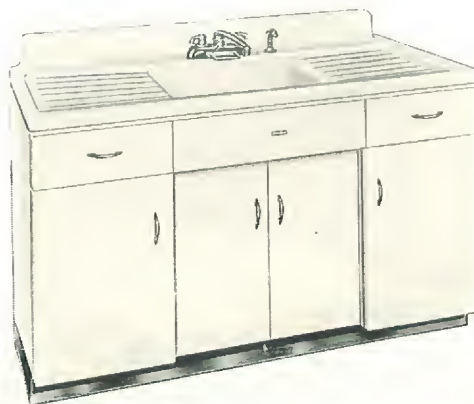


**ASC 54x25 D (Deluxe)**

This deluxe unit has two 6" deep drawers, one with cutlery divider and linoleum bottom. Under the right-hand 6" deep drawer are installed two 12" exposed drawers. Under the left-hand 6" deep drawer is a single door cupboard with a sliding shelf. The undersink compartment has two doors with a wire utility basket installed on the inside of one.

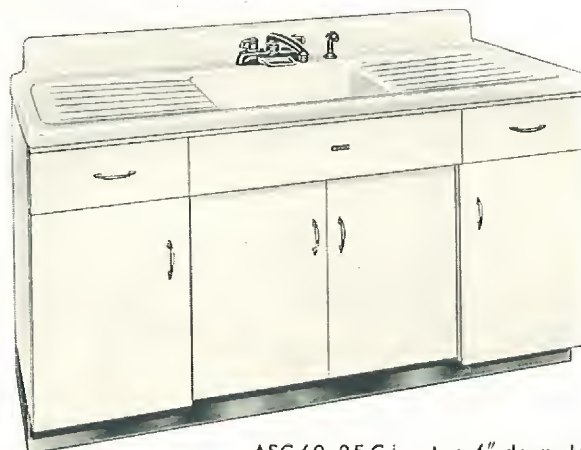


**ASC 60x25 C (Regular)**

ASC 60x25 C has two 6" deep drawers. In the right-hand 6" deep drawer is installed a cutlery divider and linoleum bottom. Beneath each 6" deep drawer is a single door cupboard containing a sliding shelf. The recessed undersink compartment has two doors. On the inside of one is installed a wire utility basket. Also available in 22" undersink cabinet ASC 60x22 C for use with 22" Utility Hostess sink with double drainboard.

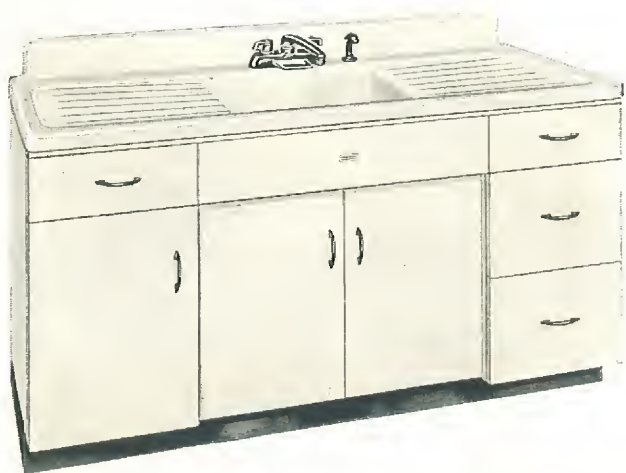


#### **ASC 60x25 D (Deluxe)**

This deluxe unit has two 6" deep drawers. In one is installed a cutlery divider and linoleum bottom. Below the right-hand 6" deep drawer, there are two 12" deep exposed drawers. Under the left-hand 6" deep drawer is a single door cupboard containing one sliding shelf. The recessed undersink compartment has two doors. On the inside of one is installed a wire utility basket.

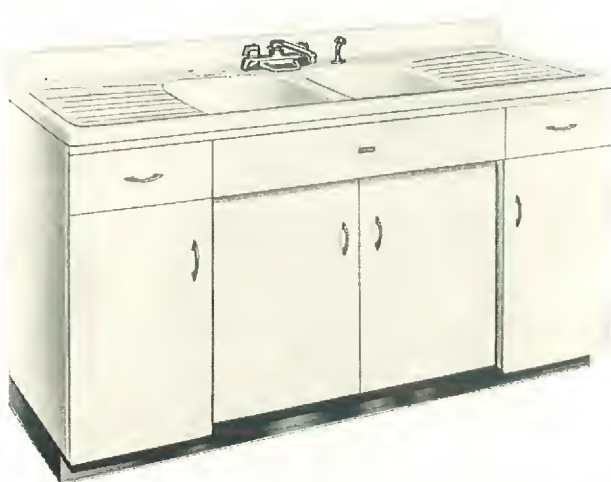

#### **ASC 66x25 C (Regular)**

This cabinet has two 6" deep drawers. In one is installed a cutlery divider and linoleum bottom. Cupboards below the 6" deep drawers have single doors and a sliding shelf installed in each. The recessed undersink compartment has two doors, with a wire utility basket installed on the inside of one.

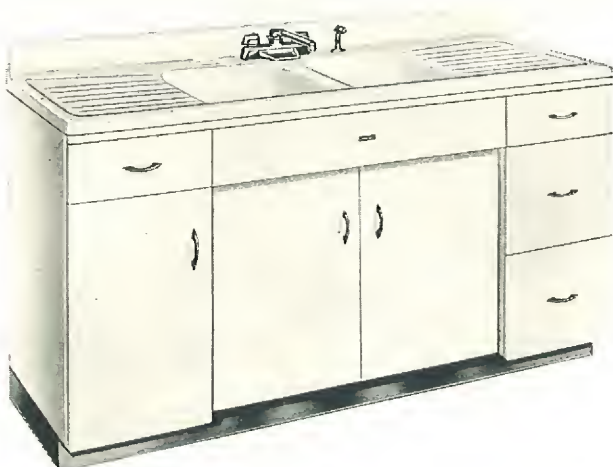

#### **ASC 66x25 D (Deluxe)**


This deluxe unit has two 6" deep drawers. In one is installed a cutlery divider and linoleum bottom. Below the right-hand 6" deep drawer are installed two large 12" deep exposed drawers. The cupboard on the left, under the 6" deep drawer, has a single door and one sliding shelf. The recessed undersink compartment has two doors, with a wire utility basket installed on one.





#### **ASC 72x25 C (Regular)**

The ASC 72x25 C (Regular) cabinet has two 6" deep drawers. In one is installed a cutlery divider and linoleum bottom. Under each 6" deep drawer is a single door cupboard containing one sliding shelf. The recessed undersink compartment has four doors. A sliding two-bar towel rack and two sliding vegetable baskets are installed in the undersink compartment. A wire utility basket is located on the inside of the left-center door.

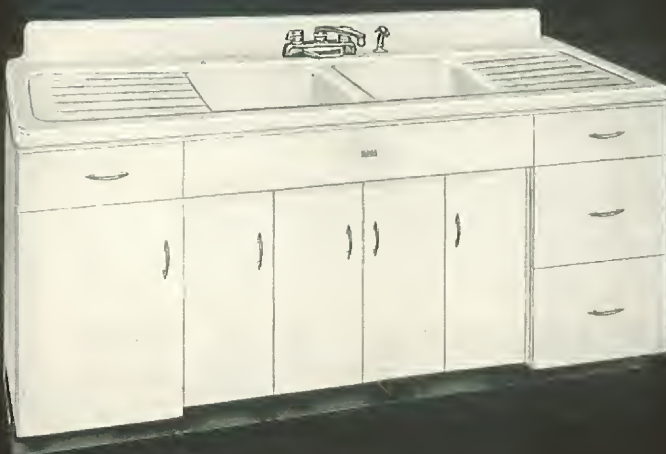

#### **ASC 72x25 D (Deluxe)**

This deluxe unit has two 6" deep drawers. In one is installed a cutlery divider and linoleum bottom. Under the left-hand 6" deep drawer, there is a single door cupboard containing one sliding shelf. Under the right-hand 6" deep drawer there are two large 12" deep exposed drawers. The recessed undersink compartment has four doors. A sliding two-bar towel rack and two sliding vegetable baskets are installed in the undersink compartment. A wire utility basket is located on the inside of the left-center door.



### **sink fronts**

Sink fronts are designed for installation with adjoining cabinets on either side. They are an economical substitute for an undersink cabinet. Sink fronts are particularly adaptable to flat rim sink installations where a continuous countertop is being used. No shelves or drawers can be used. Shipped with bottom plate attached unless otherwise specified.

**ASF 24**

**ASF 30**

**ASF 36**


**ASF 42**




## base cabinets




ACD 1530 (L.H.)  
ACD 1830 (L.H.)



ACD 1530 (R.H.)  
ACD 1830 (R.H.)



ACD 21  
ACD 24  
ACD 27



ACD 30  
ACD 36


## wall cabinets




AWC 1530 (L.H.)  
AWC 1830 (L.H.)



AWC 1530 (R.H.)  
AWC 1830 (R.H.)



SIDE VIEW




AWC 2130 AWC 3030  
AWC 2430 AWC 3630  
AWC 2730

## cabinet dimensions

## undersink cabinets



ASC 42x25 A




ASC 42x25 (L.H.)  
ASC 42x25 C (L.H.)




ASC 42x25 (R.H.)  
ASC 42x25 C (R.H.)

## undersink cabinets

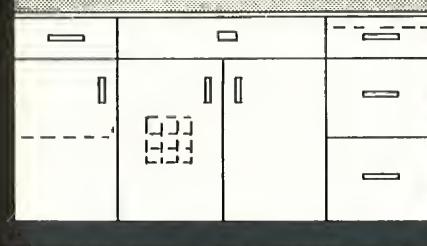


ASC 54x25 D  
ASC 60x25 D  
ASC 66x25 D

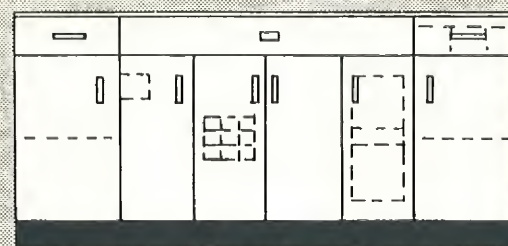


ASC 72x25 C


## corner base cabinet

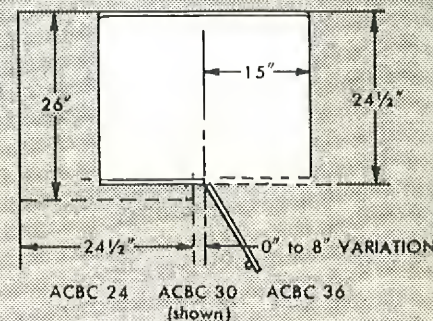







ACD 42  
ACD 48




AD 15  
AD 18  
AD 21  
AD 24




AD 30  
AD 36




AD 42  
AD 48



SIDE VIEW

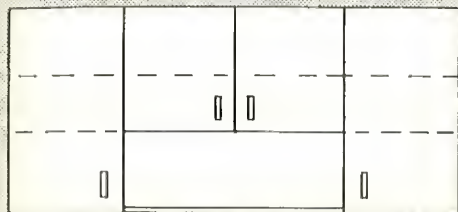

AWC 5430 with utility shelf




ACWC 25 3/4 (L.H.)  
ACWC 25 3/4 (R.H.)




AWC 3615



AWC 2118  
AWC 2418  
AWC 3018  
AWC 3618  
AWC 4218




ASC 42x25 D (L.H. or R.H.)  
(Right hand shown above)

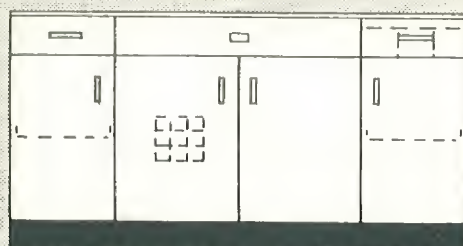


ASC 54x25 C ASC 54x25 ASC 60x25 C ASC 66x25 C

ASC 54x25 with-  
out shelves, cutlery  
divider, or wire  
utility basket



SIDE VIEW

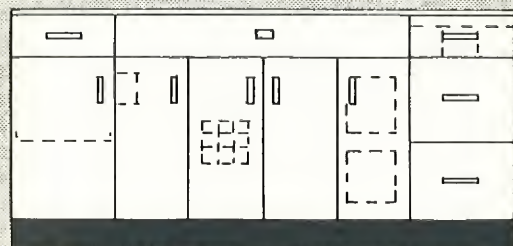


ASC 72x25 D




ASF 24 ASF 36  
ASF 30 ASF 42

**sink fronts**


**fillers**




CORNER WALL  
ANGLE & PLATE  
ACWA 30 ACWP



WALL FILLER  
AWF 18  
AWF 30




CORNER  
BASE ANGLE  
ACBA



BASE FILLER  
ABF

**utility cabinets**

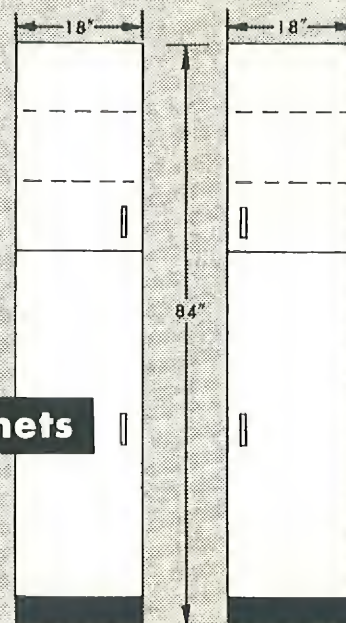

AUC 13 (L.H.)  
AUC 24 (L.H.)  
84" H x 18" W x 13 1/4" D  
AUC 13 (R.H.)  
AUC 24 (R.H.)  
84" H x 18" W x 24 1/2" D



## cabinet accessories

American-Standard offers a wide variety of work-saving accessories to make the modern kitchen a more convenient place to work. These low-cost kitchen accessories require little space but do a big job of highlighting any kitchen installation.

No kitchen is really personalized without such useful accessories to ease the homemaker's daily chores and provide storage space for many specialized kitchen items. You can supplement the basic storage units and customize all of your kitchen installations by including this complete line of smartly-styled accessories in your kitchen plans.

### Slicing Board

American-Standard slicing board constructed of finest quality hardwood. Electronically glued and impregnated with paraffin in infra-red ovens for easy cleaning. Slicing boards are rabbeted to rest on the edges of the drawer. Made in 15" (X 101) and 18" (X 102) sizes to fit drawers in base or undersink cabinets.




### Flour Sifter or Sugar Dispenser

This large capacity dispenser holds ten pounds of flour. Constructed of lustrous metal, the dispenser slides in and out for easy access. Designed to fit wall cabinets 15" wide or larger, 10" wide x 10" deep x 9" high. (X 103)



### Wire Utility Basket

This strong utility basket is made of welded steel wire with durable electroplated finish. Ideal for storage of packaged soap chips. Can be installed on any cupboard door under the sink. Size: 7½" long x 3¾" deep x 4½" high. (X 104)

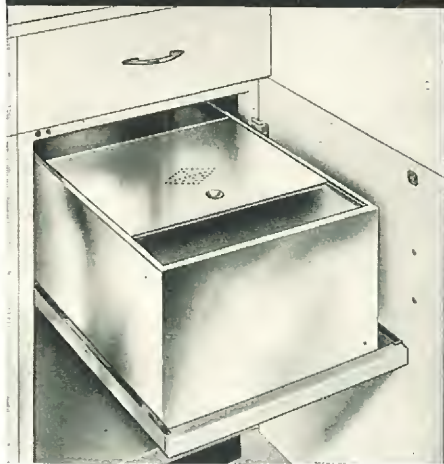

### Bread or Cake Box


Manufactured in easy-to-clean lustrous metal with a "sliding-in-groove" top that is perforated for proper ventilation. Furnished in two sizes to fit sliding drawers or shelves of American-Standard Undersink Cabinets or 15" and 18" base cabinets.

Size of box for 15" drawer or shelf: (X 108)

10¾" wide x 8¼" high x 19" long.


Size of box for 18" drawer or shelf: (X 109)

13¾" wide x 8¼" high x 19" long.

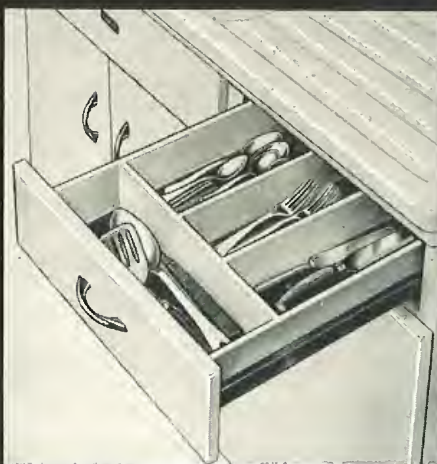

### Cutlery Divider

Contains four roomy compartments, lined with easy-to-clean linoleum. Can be installed in the 6" deep drawers of any 15" or 18" American-Standard Base Cabinets. It can also be installed in any 6" deep drawer of American-Standard Undersink Cabinets. Installation is accomplished by insertion of a single sheet metal screw into a factory punched hole. 15" size (X 110) and 18" size. (X 111)

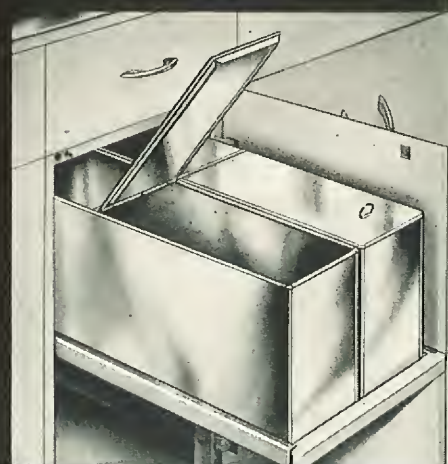

### Flour, Sugar or Meal Boxes

Two storage boxes are designed to fit on sliding shelves of 15" wide base cabinets or sliding shelves of undersink cabinets. Easy-to-clean lustrous metal. Easily accessible, each box has a capacity of 18 lbs. of flour. 5½" wide x 8¼" high x 20¾" long. Sold in pairs only and packed two to a carton. (X 112)



### Maple Counter Tops

Constructed of hard Maple, carefully dried and conditioned in modern, dry kilns. Electronically glued—accurately milled—sealed against moisture. 1½" thick. Back-splashes are 1" thick and 4" high.

Sizes: 15"x25" 18"x25" 21"x25" 24"x25"  
"L" shaped Maple Counter Top for corner: 26" x26"x25". This top requires a space of 26" along each wall, measured from the corner. It is 25" deep from front to back, matching the depth of adjoining counter-tops or cabinet sinks.



### Condiment Rack





For use in wall cabinets for easy accessibility and storage of small packaged condiments. Made of heavy electroplated wire, with four rubber feet to protect the surface of cabinet shelves. Size: 10" wide x 8¼" deep x 7¾" high. (X 105)

### Tray Rack

Furnished with three compartments for ample tray storage. Constructed of heavy gauge steel with safety rolled edges. Suitable for use in all base cabinets, but particularly recommended for ACD 15. (X 106)

### Sliding Towel Bar

Double glass rod towel bar glides in and out with the touch of a finger. For factory installation in any 24½" deep undersink cabinet except ASC 42x25 A. (X 107)

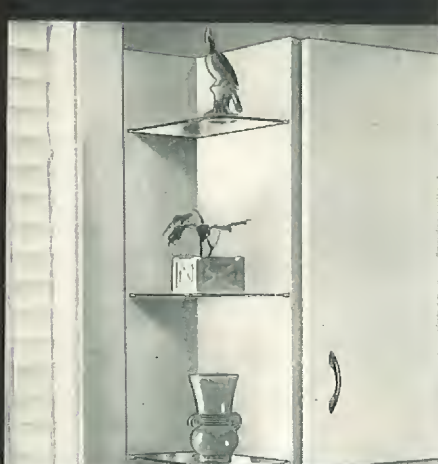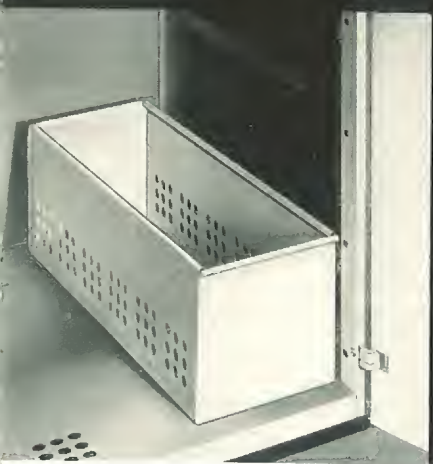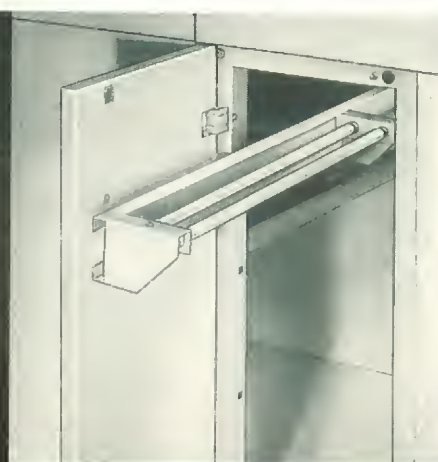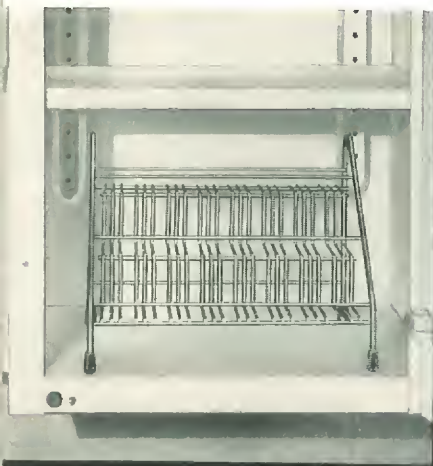

### Fruit or Vegetable Basket

Strong construction of heavy metal with rolled edges for strength and safety. Adequately perforated for ventilation. These baskets for storage of dry fruit and vegetables are usually placed in cupboard compartments of undersink cabinets. Size: 7½" wide x 7½" high x 21" long. Sold in pairs only. Packed two to a carton. (X 113)

### Composition Shelf Covering

Lightweight linoleum, to cover shelves and drawer bottoms in wall and base cabinets. Serves as a cushion for dishes, etc., and preserves the finish on the shelves and drawer bottoms. Shelf covering is removable for easy cleaning. This material is cut to size of cabinets. Furnished in color on hand at time of shipment. (X 114)

### What-Not Shelves

What-not shelves add the final touch to a well-designed kitchen. The three beveled and polished plate glass shelves are easily removed from the gleaming white steel corner shelf supports. Overall measurements are 6¾" wide x 12¼" deep x 30" high. Glass shelf dimensions 7½" thick x 11½" x 5½". Packed two to a carton. Sold in pairs only. (X 115)

# AMERICAN-Standard disposer

## Model D1

(Available August 1, 1952)

### specifications

Listed by Underwriters' Laboratories, Inc.

Over-All Dimensions—8 $\frac{7}{8}$ " Wide x 11" Deep x 18 $\frac{3}{16}$ " High

Finish—Harbor Blue enamel body with chromium-plated sink flange

Net Weight—60 lbs.

Shipping Weight—Approximately 63 lbs.

Sink Connection—For 3 $\frac{1}{2}$ " to 4" opening.

Sink Adapter Fitting—Special kit permits installation in non-standard sinks, with drain openings over 4" and up to 5 $\frac{1}{2}$ ". Order separately.

Drain Connection—Can be rotated to any position for slip-joint connection to conventional 1 $\frac{1}{2}$ " "P" or "S" type trap.

Electrical Connections—To be made in accordance with local wiring codes. Hole provided in control housing for BX armored cable connection.

Motor—Type FJ,  $\frac{1}{3}$ -hp, 115-volt, 60-cycle, 6.8 amp.

### principal features

**SAFETY TOP CONTROL**—Handle and stopper are polished, chromium-plated die-casting; other parts are of chromium-plated bronze. Serves as an operating control, as a drain stopper and as a safety seal of shredding compartment when Disposer is in operation. Disposer can't run unless the safety top control is in place.

**SINK FLANGE**—Fits in the sink opening and encloses the safety top control. Clearly marked "Drain", "Seal", and "On".

**SINK MOUNTING**—Consists of four setscrews in a die-cast supporting ring. Assures watertight seal. Adaptable for installation in porcelain enameled steel sinks or enameled cast iron sinks.

**RESILIENT MOUNTINGS**—Neoprene cushion at sink mountings and around shredding sleeve minimizes vibration and noise.



**SHREDDING COMPARTMENT**—Non-ferrous alloy casting, resists corrosion. Houses the shredding sleeve.

**SHREDDING ELEMENTS**—Made of high-grade alloy steel. Shredding sleeve has three protruding shredding elements, double-edged for longer life. At the bottom are 45 slots, serving as secondary shredders and strainers. Flywheel is directly connected to the motor. Flywheel carries impellers on top, one stationary, the other retractable. Also carries a projecting vane on its underside to provide adequate pumping action to flush away water-borne waste.

**MAIN BEARING**—Timken roller bearing. Smooth in operation.

**MOTOR HOUSING**—Of high-grade cast iron.

**MOTOR**—Capacitor-start, induction-run, protected by built in overload protection. Lightweight, current-thrifty, with extra power built in for starting and heavy-duty grinding. Bearing lubricated with proper grade and amount of grease for lifetime operation.

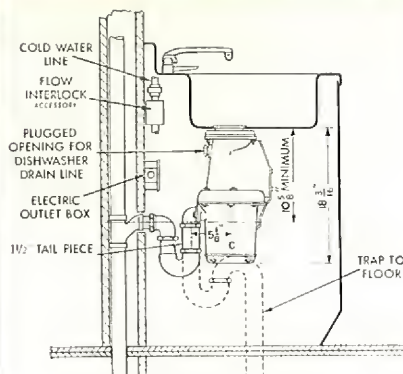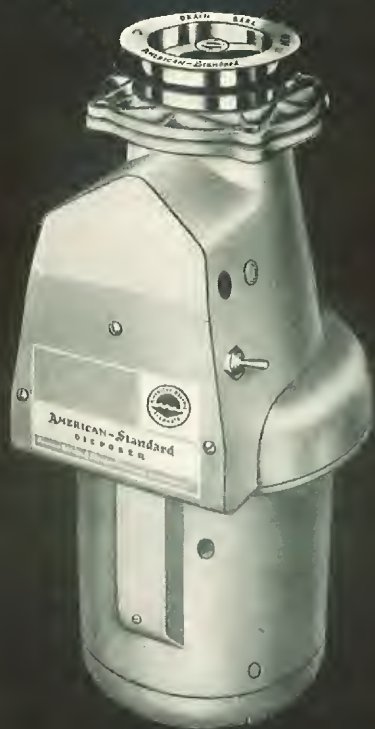

NOTE Flow interlock and electrical outlet box may be installed in basement, if desired

### operation

- Scrape waste in drain opening.
- Place safety-top control in drain opening. Set to "On". Turn on cold water.
- Waste is immediately flushed into the shredding compartment.
- Flywheel, aided by impellers (E) throws waste against shredding elements (F), then against strainers (G).
- Shredded particles are flushed away. The flushing action keeps drains clean.
- Powerful motor disposes of waste in a matter of seconds.

### installation

Outlet designed for 1 $\frac{1}{2}$ " slip-joint connection to "P" or "S" type trap, in accordance with local plumbing code. Can be rotated to any position for easy connection.

Use drainage-type fittings. Avoid grease traps. Drain lines must slope not less than  $\frac{1}{4}$ " per foot.

If any deviations from the specifications stated herein become necessary, alternate materials or specifications will be fully adequate to maintain the performance described in this catalogue sheet.

**Important!** Disposer is supplied less reversing switch and flow interlock control. These accessories may be ordered separately at extra cost.

**REVERSING SWITCH (Accessory)**—Manually operated, permits reversing direction of flywheel to take advantage of double-edged shredders . . . increasing life of disposer. Also eliminates jamming conditions which may stall motor.

**FLOW INTERLOCK (Accessory)**—Installed in the cold-water line to sink faucet. Interlocks electrically with the control switch to assure proper flow of water through the shredder elements whenever unit operates.



# Aeropel kitchen ventilator

(Available August 1, 1952)

The Aeropel Kitchen Ventilator is winner of two Fine Arts Awards for beauty and utility. Aeropel is easily installed, reasonably priced, and costs just a few cents a month to operate. It is ideal for bathrooms, laundry, recreation room, and small commercial installations, in addition to kitchens.

For the best kitchen results, the Aeropel should be installed as near as possible to the range. Thus, cooking odors, grease, smoke and fumes are caught and removed right at the source and have no chance to settle on walls or furniture.

Only the finest materials go into the construction of an Aeropel Kitchen Ventilator. The smartly-styled grille is made of moulded white plastic and offers minimum resistance to airflow. Fan is driven by a totally enclosed, constant speed, quiet-operating motor. This shaded pole, fan type motor with wool packed bronze bearings is suitable for either horizontal or vertical operation. It is also suitable for 50 or 60 cycle, 110-120 volt single phase, alternating current only. Power consumption is 60 watts. If direct current motor is required it can be supplied on special order.

Fabricated steel wall box is rust-proof. Aeropel starts to operate automatically when weather door is opened, stops when door is closed. Switch chain has Mark of Merit plastic pendant and operates with "feather touch."


The plastic grille may be installed vertically or horizontally. Either way offers minimum resistance to airflow.

The Model KV 1 Aeropel Fan has Certified Capacity Rating of 400 cubic feet per minute at free delivery with wall box and grille in place. All tests are made in accordance with the standard test code for propeller fans, adopted jointly by the National Association of Fan Manufacturers and the American Society of Heating and Ventilating Engineers.

*Note:* Where wall is more than 11" thick, or where there is an air space in the wall which the wall box will not bridge, the 10 $\frac{1}{8}$ " x 10 $\frac{1}{8}$ " opening should be lined with a No. 30 gauge sheet metal sleeve.

## features

- Easy to install and operate
- New white plastic grille
- Whisper-quiet in operation
- Keeps kitchens cool and fresh
- Outside door opens only when fan is operating
- Removes greasy smoke, fumes and odors in a jiffy
- Cuts cleaning and decorating bills

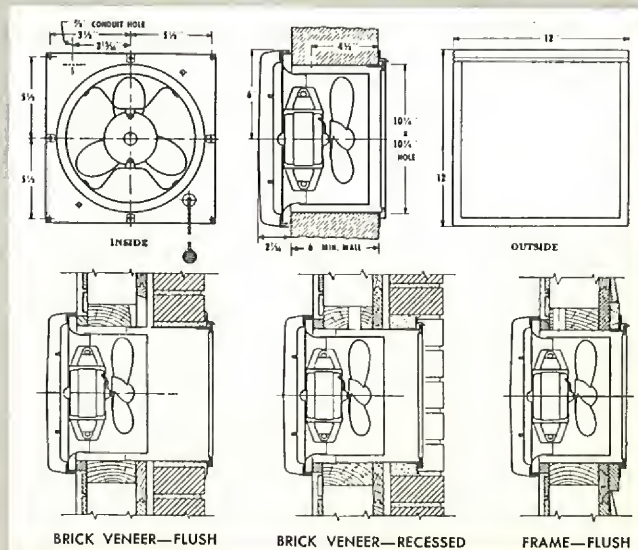

BRICK VENEER—FLUSH

BRICK VENEER—RECESSED

FRAME—FLUSH

## wall and base fillers and angles

Wall and base fillers are designed to make it unnecessary to stock base and wall cabinets of special dimensions. They are used for filling in when the measurements of the floor and wall space do not exactly coincide with that of the base and wall cabinets selected.

This is illustrated in the drawing at the right.

Wall fillers have the same finish as the cabinets, so that they appear to be a definite part of the assembly. The base fillers are finished in a similar manner, except that as part of the base filler, there is a black sub-base attached, of the same width as the filler being used.

The illustration at the right also shows the use of the corner base angle, which is used when no cabinet is installed in the corner. In the corner of the wall cabinet assembly the corner wall angle and corner wall plate are used when no corner wall cabinet is installed.

Wall Fillers—AWF— $\frac{1}{2}$ " ; 1" ;  $1\frac{1}{2}$ " 2" ;  $2\frac{1}{2}$ "

Base Fillers—ABF— $\frac{1}{2}$ " ; 1" ;  $1\frac{1}{2}$ " ; 2" ;  $2\frac{1}{2}$ "

Corner Wall Angles—ACWA—30" high

Corner Wall Plates—ACWP

Corner Base Angles—ACBA— $1\frac{1}{2}$ "x $1\frac{1}{2}$ "

9" Scribing Filler—AWF 9—for wall cabinets

ABF 9—for base cabinets

## sink moulding strip

Where an enameled cast iron or porcelain enamel steel sink joins the counter-top of adjacent base cabinets, a slight gap normally occurs between the two. For the purpose of covering this opening and to make the drainboard continuous with the tops, a moulding strip having a  $\frac{1}{8}$ " web is secured with screws to the base cabinet top or tops adjoining the sink, thus making a water-tight joint. Made from die cast zinc, chrome plated and polished. Packed in pairs, right and left. Will fit most sinks. Sink moulding strip does not have to be cut for 25" cast iron sinks. When used with steel sinks or 22" cast iron sinks, strip can be easily cut to size in the field. (X 116)

## vinyl counter tops ( $\frac{1}{2}$ " thick)


Long wearing Vinyl counter tops have 4" backsplash. Built with reinforced cores, coved back, and stainless steel nosing. Colors: Marbleized Black, Marbleized Grey, Marbleized Red, Marbleized Yellow, and Marbleized Blue.

Sizes: 12"x25", 15"x25", 18"x25", 21"x25", 24"x25", 27"x25", 30"x25", 36"x25", 42"x25", 48"x25".

Corner counter-top size is 26"x26"x25"

This top requires a space of 26" along each wall, measured from the corner. It is 25" deep from front to back, matching the depth of adjoining counter-tops or cabinet sinks.

Vinyl is a dense but resilient plastic material for sink tops and counter-tops. It is extremely resistant to wear and abrasion. Vinyl outlasts other composition materials. It is completely impervious to the action of water, common grease, oil, and cleaning compounds. No waxing is necessary. Modern designs. Colors will not fade, wash or wear off. Vinyl will not mildew or support bacterial growth.

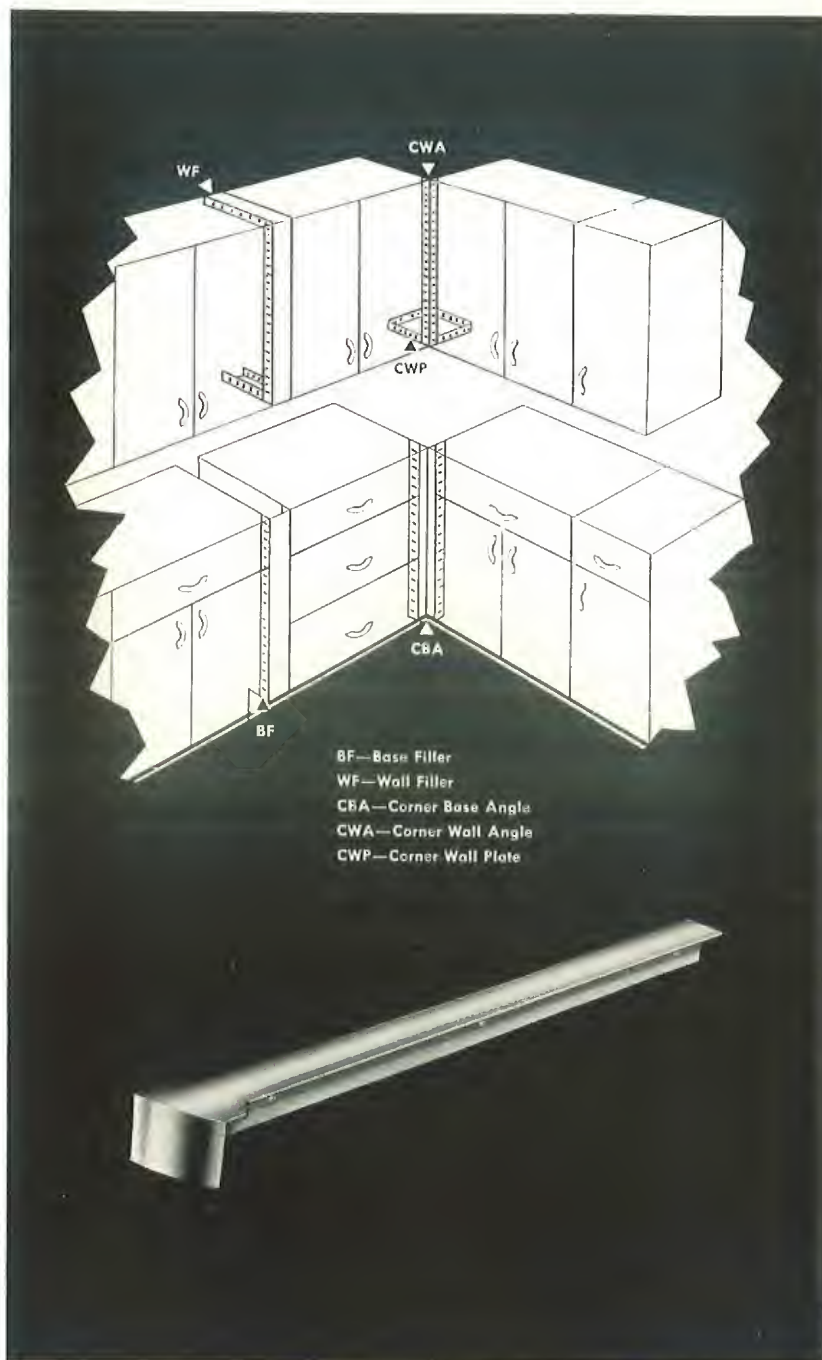



### sinks for 25" undersink cabinets

for use with cabinet number	sink series number	sink type	for description refer to page
ASC 42x25 A	P 6575	cast iron—double compartment	18
	P 7424	cast iron—sink and laundry tray	18
	P 6550	cast iron—sink and drainboard	18
	S 550	steel—sink and drainboard	20
ASC 42x25 (also C and D)	P 6550	cast iron—sink and drainboard	18
	S 550	steel—sink and drainboard	20
ASC 54x25 (also C and D)	P 6535	cast iron—sink and double drainboard	19
	S 554	steel—sink and double drainboard	20
ASC 60x25 C (also D)	P 6535	cast iron—sink and double drainboard	19
	P 6585	cast iron—double sink and double drainboard	19
ASC 66x25 C (also D)	S 566	steel—double sink and double drainboard	20
ASC 72x25 C (also D)	P 6585	cast iron—double sink and double drainboard	19

### sinks for 22" undersink cabinets

ASC 42x22 C	P 6850	cast iron—sink and drainboard	24
ASC 54x22 C	P 6835	cast iron—sink and double drainboard	24
ASC 60x22 C	P 6835	cast iron—sink and double drainboard	24

\*Note P 6875 double compartment 22" Utility Hostess sink can be used with ASF 42" sink front only. See page 24.

### flat rim sinks (with back ledge)

sink size	sink series number	sink type	for description refer to page
22"x21"	S 1309	steel—single compartment	23
24"x21"	P 7010	cast iron—single compartment	21
	S 1310	steel—single compartment	23
30"x21"	P 7010	cast iron—single compartment	21
32"x21"	P 7015	cast iron—double compartment	21
32"x21"	S 1311	steel—double compartment	23
36"x21"	P 7000	cast iron—double compartment with waste receptor	22
42"x21"	P 7004	cast iron—sink and drainboard	21
	P 7015	cast iron—double compartment	21
54"x21"	P 7002	cast iron—sink and double drainboard	21

### flat rim sinks (without back ledge) double compartment

32"x20"	P 7037 D	cast iron—double compartment	22
42"x20"	P 7037 D	cast iron—double compartment	22

### single compartment

12"x12"	P 7021 D	cast iron—center outlet	22
18"x12"	P 7020 D	cast iron—end outlet	22
18"x16"	S 1302	steel—center outlet	23
20"x16"	P 7020 D	cast iron—end outlet	22
24"x16"	P 7020 D	cast iron—end outlet	22
	P 7021 D	cast iron—center outlet	22
24"x18"	P 7020 D	cast iron—end outlet	22
	P 7021 D	cast iron—center outlet	22
	S 1304	steel—center outlet	23
24"x20"	P 7021 D	cast iron—center outlet	22
30"x18"	P 7020 D	cast iron—end outlet	22
	P 7021 D	cast iron—center outlet	22
30"x20"	P 7020 D	cast iron—end outlet	22
	P 7021 D	cast iron—center outlet	22

**AMERICAN-Standard**

**sink selection  
guide**

## Royal Hostess cast iron sinks

for 25" undersink cabinets  
acid-resisting enamel

### P 6550

#### sink and drainboard

(for use with ASC 42x25 A, ASC 42x25, ASC 42x25 C,  
ASC 42x25 D undersink cabinets)

includes wall hangers—B 989 crumb cup strainer—B 960 H  
1½"x1½" P trap.

size	sink compartment	back
42"x25"	19¾"x17¾"x8"	4"

sink numbers		combination fittings
L.H. drainboard	R.H. drainboard	
P 6550 A	P 6552 A	B 876 T MF auto-unit double faucet—hose and spray—"Spring-Flo" aerator
P 6550 N	P 6552 N	B 878 T same without aerator
P 6551 A	P 6553 A	B 876 faucet—"Spring-Flo" aerator
P 6551 N	P 6553 N	B 878 same without aerator

### P 6575

#### double compartment

(for use with ASC 42x25 A undersink cabinet)

includes wall hangers—(2) B 989 crumb cup strainers—(2)  
B 960 H 1½"x1½" P traps.

size	sink compartment	back
42"x25"	17½"x17¾"x8"	4"

sink number	combination fittings
P 6575 A	B 876 T MF auto-unit double faucet—hose and spray—"Spring-Flo" aerator
P 6575 N	B 878 T same without aerator
P 6576 A	B 876 double faucet—"Spring-Flo" aerator
P 6576 N	B 878 same without aerator

### P 7424

#### sink and laundry tray


acid-resisting or regular enamel

(for use with ASC 42x25 A undersink cabinet)

includes wall hangers—B 989 crumb cup strainer—B 998 tray  
plug—P 7450 enameled movable drainboard.

size	compartments		depth sink	depth tray	height back
	length	width			
42"x25"	17¾"	16½"	8"	13"	4"

sink number		combination fittings
L.H. sink	R.H. sink	
P 7424 A	P 7425 A	B 876 double faucet—"Spring-Flo" aerator
P 7424 N	P 7425 N	B 878 same less aerator

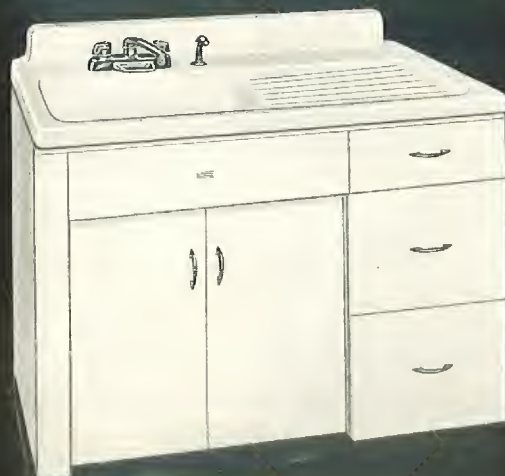





#### P 6535


##### sink and double drainboard

(for use with ASC 54x25, ASC 54x25 C, ASC 54x25 D, ASC 60x25 C, ASC 60x25 D undersink cabinets)

includes wall hangers—B 989 crumb cup strainer—B 960 H 1½"x1½" P trap.

sizes	sink compartments	back
54"x25"	20"x17¾"x8"	4"
60"x25"		

sink number	combination fittings
P 6535 A	B 876 T MF auto-unit double faucet—hose and spray—"Spring-Flo" aerator
P 6535 N	B 878 T same without aerator
P 6536 A	B 876 double faucet—"Spring-Flo" aerator
P 6536 N	B 878 same without aerator

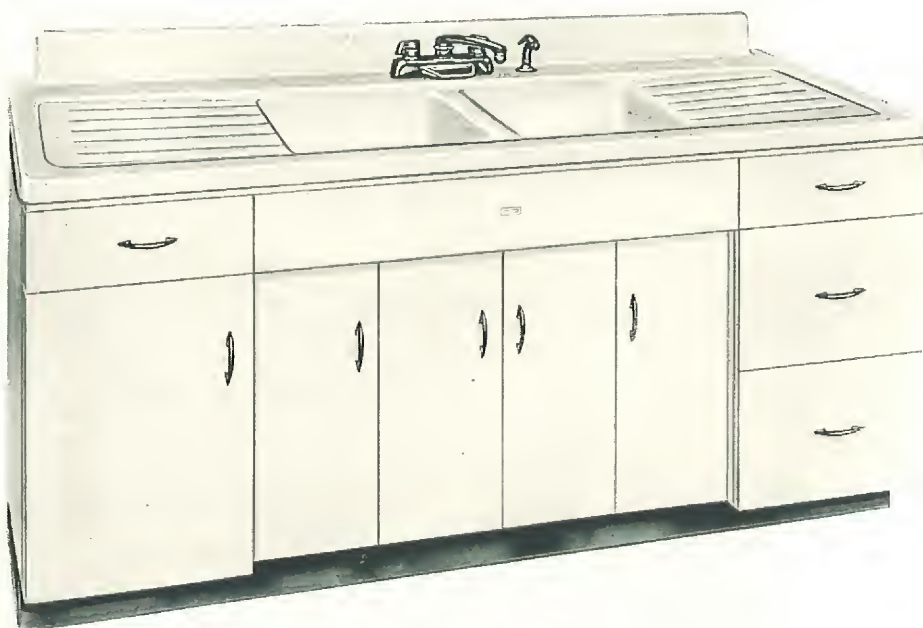

#### P 6585

##### double sink and double drainboard

(for use with ASC 60x25 C, ASC 60x25 D, ASC 72x25 C, ASC 72x25 D undersink cabinets)

includes wall hangers—(2) B 989 crumb cup strainers—(2) B 960 H 1½"x1½" P traps.

size	sink compartments	back
60"x25"	13½"x17¾"x8"	4"
72"x25"	16"x17¾"x8"	4"

sink number	combination fittings
P 6585 A	B 876 T MF auto-unit double faucet—hose and spray—"Spring-Flo" aerator
P 6585 N	B 878 T same without aerator
P 6586 A	B 876 double faucet—"Spring-Flo" aerator
P 6586 N	B 878 same without aerator

## porcelain enameled steel sinks

### S 550 sink and drainboard

(for use with ASC 42x25 A, ASC 42x25,  
ASC 42x25 C, ASC 42x25 D, undersink cabinets)

size	sink compartment	back
42"x25"	16½"x20"x7"	4"

1½" punchings

**S 550 left hand drainboard**  
**S 552 right hand drainboard**



### S 554 sink and double drainboard

(for use with ASC 54x25, ASC 54x25 C,  
ASC 54x25 D, undersink cabinets)

size	sink compartment	back
54"x25"	16½"x20"x7"	4"

1½" punchings



### S 566 double sink and double drainboard

(for use with ASC 66x25 C, ASC 66x25 D,  
undersink cabinets)

size	sink compartment	back
66"x25"	15⅞"x17⅞"x7¼"	4"


1½" punchings





# cast iron flat rim sinks

for 25" undersink cabinets  
acid-resisting enamel

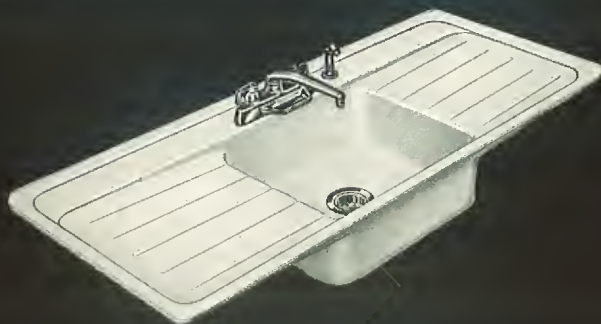

## P 7002 sink and double drainboard

back ledge—includes B 989 crumb cup strainer

size	sink compartment	width ledge
54"x21"	18½"x15½"x8"	3"
sink number	combination fittings	
P 7002 A	B 876 T MF auto-unit double faucet—hose and spray—"Spring-Flo" aerator	
P 7002 N	B 878 T same without aerator	
P 7003 A	B 876 double faucet—"Spring-Flo" aerator	
P 7003 N	B 878 same without aerator	

## P 7004 sink and drainboard

back ledge—includes B 989 crumb cup strainer

size	sink compartment	width ledge
42"x21"	19½"x15½"x8"	3"
sink number		combination fittings
L.H. drainboard	R.H. drainboard	
P 7004 A	P 7008 A	B 876 T MF auto-unit double faucet-hose and spray—"Spring-Flo" aerator
P 7004 N	P 7008 N	B 878 T same without aerator
P 7005 A	P 7009 A	B 876 double faucet—"Spring-Flo" aerator
P 7005 N	P 7009 N	B 878 same without aerator

## P 7015 double compartment

back ledge—includes (2) B 989 crumb cup strainers

sizes	sink compartments	width ledge
32"x21"	13½"x15½"x8"	3"
42"x21"	18½"x15½"x8"	3"
sink number	combination fittings	
P 7015 A	B 876 T MF auto-unit double faucet—hose and spray—"Spring-Flo" aerator	
P 7015 N	B 878 T same without aerator	
P 7016 A	B 876 double faucet—"Spring-Flo" aerator	
P 7016 N	B 878 same without aerator	

(also available in 42"x20" flat rim sink and laundry tray P 7415 D—acid resisting or regular enamel, without back ledge. compartments 18½" long and 17½" wide. sink depth 8". tray depth 13".)

## P 7010 single compartment

back ledge—includes B 989 crumb cup strainer

sizes	sink compartment	width ledge
24"x21"	21½"x15½"x8"	3"
30"x21"	27½"x15½"x8"	3"
sink number	combination fittings	
P 7010 A	B 876 T MF auto-unit double faucet—hose and spray—"Spring-Flo" aerator	
P 7010 N	B 878 T same without aerator	
P 7011 A	B 876 double faucet—"Spring-Flo" aerator	
P 7011 N	B 878 same without aerator	

**P 7021 D (center outlet)**  
**P 7020 D (end outlet)**  
**single compartment**

includes B 989 crumb cup strainer

sizes (center outlet)	sizes (end outlet)	depth
12"x12", 24"x16", 24"x18"	18"x12", 20"x16", 24"x16"	6"
24"x20", 30"x18", 30"x20"	24"x18", 30"x18", 30"x20"	6"

sink number
P 7021 D (center outlet)
P 7020 D (end outlet)

combination fittings not included.  
specify separately.




**P 7037 D**  
**double compartment**

center outlets—includes (2) B 989 crumb cup strainers

sizes	sink compartments
32"x20"	13 1/2"x17 1/2"x8"
42"x20"	18 1/2"x17 1/2"x8"

combination fittings are not included. specify separately.

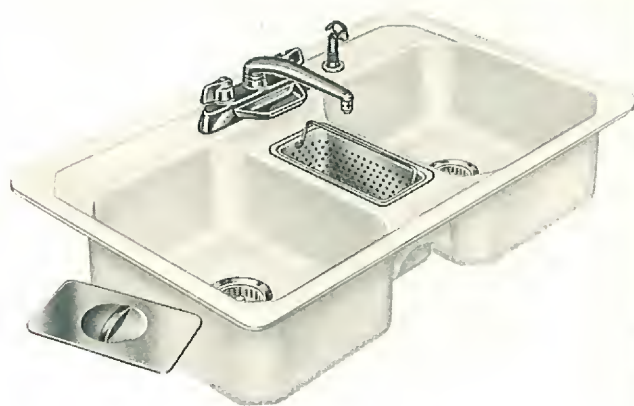


**P 7000**  
**double compartment with waste receptor**

back ledge—includes perforated container and cover—  
(2) B 989 crumb cup strainers—B 996 T drain plug.

size	sink compartments	width ledge
36"x21"	13 1/2"x15 1/2"x8"	3"

sink number	combination fittings
P 7000 A	B 876 T MF auto-unit double faucet—hose and spray—"Spring-Flo" aerator
P 7000 N	B 878 T same without aerator
P 7001 A	B 876 double faucet—"Spring-Flo" aerator
P 7001 N	B 878 same without aerator

**sink fittings**



B 876 T MF auto-unit—exposed deck type—renewable seats—swinging spout—"Spring-Flo" aerator—hose and thumb controlled spray—inlets 8" C to C threaded 1/2" inside—1 1/4" maximum counter-top thickness

B 878 T same less aerator

B 576 T same as B 876 T but for steel sinks


B 578 T same as B 878 T but for steel sinks

B 876 exposed deck type—double faucet—renewable seats—swinging spout—"Spring-Flo" aerator—inlets 8" C to C threaded 1/2" inside—1 1/4" maximum counter-top thickness

B 878 same less aerator

B 989 removable crumb cup and stopper—1 1/2" tail-piece—for sinks with 3 1/2" outlet

B 589 same as B 989 but for steel sink





## porcelain enameled steel flat rim sinks



### **S-1302 single bowl sink**

18"x16"x7"

center drain pierced for 3½" strainer—this unit packed two to a carton for shipment.



### **S-1304 single bowl sink**

24"x18"x7"

center drain pierced for 3½" strainer—this unit packed two to a carton for shipment.



### **S-1309 single bowl sink**

22"x21"x7"

ledge type—center drain pierced for 3½" strainer—(4) 1½" punchings—8" centers on faucet openings—spray opening—each unit cartoned separately for shipment.



### **S-1310 single bowl sink**

24"x21"x8"

ledge type—center drain pierced for 3½" strainer—(4) 1½" punchings—8" center on faucet openings—spray opening—embossed flange around the faucet ledge keeps moisture away from counter top—each unit cartoned separately for shipment.



### **S-1311 double bowl sink**

32"x21"x8"

ledge type—off center drain pierced for 3½" strainer—(4) 1½" punchings—8" centers on faucet openings—spray opening—embossed flange around faucet ledge keeps moisture away from counter top—each unit cartoned separately for shipment.

## Utility Hostess cast iron sinks

for 22" undersink cabinets  
acid-resisting enamel



### P 6835 sink and double drainboard

(for use with ASC 54x22 C, 60x22 C)

includes wall hangers—B 989 crumb cup strainer—B 960 H 1½"x1½" P trap.

sizes	sink compartment	back
54"x22"	18"x15"x8"	4"
60"x22"	20"x15"x8"	4"

sink number	combination fittings
P 6835 A	B 876 T MF auto-unit double faucet—hose and spray—"Spring-Flo" aerator
P 6835 N	B 878 T same without aerator
P 6836 A	B 876 double faucet—"Spring-Flo" aerator
P 6836 N	B 878 same without aerator

### P 6850 sink and drainboard

(for use with ASC 42x22 C)

includes wall hangers—B 989 crumb cup strainer—B 960 H 1½"x1½" P trap.

size	sink compartment	back
42"x22"	18¾"x15"x8"	4"

sink number		combination fittings
L.H. drainboard	R.H. drainboard	
P 6850 A	P 6852 A	B 876 T MF auto-unit double faucet—hose and spray—"Spring-Flo" aerator
P 6850 N	P 6852 N	B 878 T same without aerator
P 6851 A	P 6853 A	B 876 double faucet—"Spring-Flo" aerator
P 6851 N	P 6853 N	B 878 same without aerator

### P 6875 double compartment

(for use with ASF 42" sink front, only)

includes wall hangers—(2) B 989 crumb cup strainer—(2) B 960 H 1½"x1½" P traps.

size	sink compartments	back
42"x22"	17¾"x15"x8"	4"

sink number	combination fitting
P 6875 A	B 876 T MF auto-unit double faucet—hose and spray—"Spring-Flo" aerator
P 6875 N	B 878 T same without aerator
P 6876 A	B 876 double faucet—"Spring-Flo" aerator
P 6876 N	B 878 same without aerator



## kitchenettes



## gas or electric ranges and electric refrigerators

### motels—apartment hotels—small homes


To meet the demand for Kitchenettes at a low cost and of high quality for installation in apartments, motels and small homes, American-Standard has designed units using either electric or gas ranges and with a quality electric refrigerator.

American-Standard Kitchenettes are made 66" in length.

The wall cabinet unit in the 66 inch Kitchenette is made in one piece with two welded-in shelves. The wall cabinet has a shelf area of 16½ square feet; more than ample storage space for dishes where Kitchenettes are required.

The undersink cabinet is complete with bottom for pan storage.

American-Standard cabinets are Bonderized and finished with the finest quality baked-on enamel that the market affords.

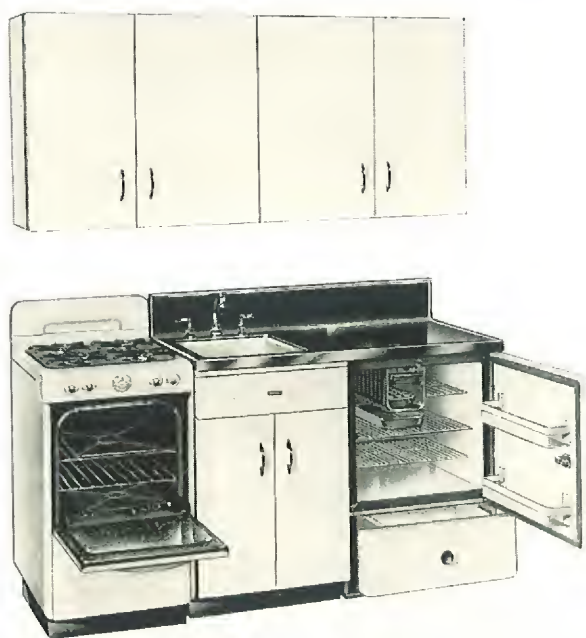

**Gas Range**—This range has four full size "Readilite" non-clog speed burners with automatic lighter. The oven is full size with non-tilt oven racks. The broiler is full size, also. The oven has automatic heat control. Entire stove built with same specifications as larger models with respect to weights of metal and quality of insulation. A full service gas range in a small space. Can be used with natural or manufactured gas or a mixture of the two.

**Refrigerator**—24" x 25" refrigerator with four full cubic feet of food storage space, 7.2 square feet of shelf area. Two ice cube trays, capacity of 48 ice cubes. Compressor hermetically sealed type using Freon 12 refrigerant. Perfect ventilation through base and sink top. Door hinged with powerful hinges. Four more ice cube trays may be added, bringing ice cube capacity to 144 cubes. Sliding drawer for vegetable storage—interior lighted by automatic light. Operates on 110 volt, 60 cycle A.C. Cold control has 11 regulating positions plus "on" and "off."

**Warranty**—Five year warranty covers sealed refrigeration circuits and electrical equipment against defects in material and workmanship.

**Electric Range**—Has Underwriters Laboratory approval for Form O installation. Wired with standard 3 wire 115-230 to 120-240 Volt, single phase 60 cycle supply line. Four high speed, spiral surface units. Five heating stages from simmer to boiling—two oven heating units—upper for broiling—lower for baking. Full oven heat control—hydraulic type—automatic. Can be installed flush to the wall or adjoining cabinet.

**Sink Top**—Linoleum covered sink top with sturdy core—covered with ventilated back, stainless steel nosing with an 18" x 16" porcelain steel bowl. 600 square inches of work surface. Faucets, less spray, 3½ crumb cup strainer. Vinyl or Formica work surfaces at extra cost.




## dimensions and installation data

### 66" with gas range

The 66" Kitchenette with gas range is made up as follows:


- 1—20" 4-burner gas range
- 1—ASF 22" sink front
- 1—24" refrigerator, R.H. hinge
- 1—46"x25" sink top—6" back splash
- 1—S 1302 18"x16" porcelain enamel steel sink
- 1—faucet
- 1—chrome brass crumb cup strainer, 3½"
- 1—AWC 6630 one-piece wall cabinet

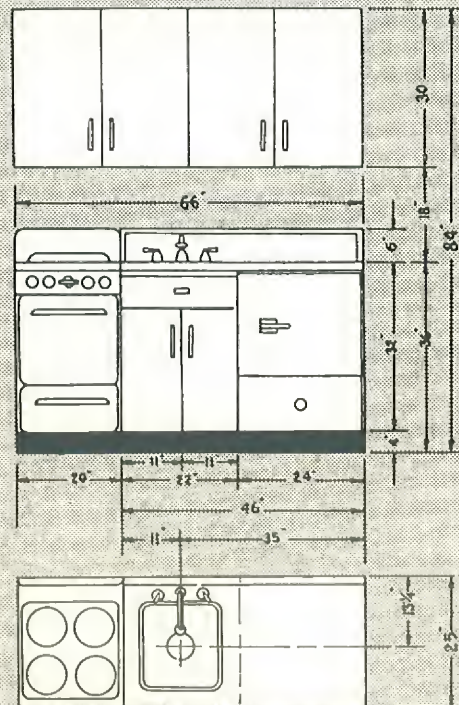

### 66" with electric range

The 66" Kitchenette with electric range is made up as follows:

- 1—22" 4-burner electric range
- 1—ASF 20" sink front
- 1—24" refrigerator, R.H. hinge
- 1—44"x25" sink top—6" back splash
- 1—S 1302 18"x16" porcelain enamel steel sink
- 1—faucet
- 1—chrome brass crumb cup strainer, 3½"
- 1—AWC 6630 one-piece wall cabinet

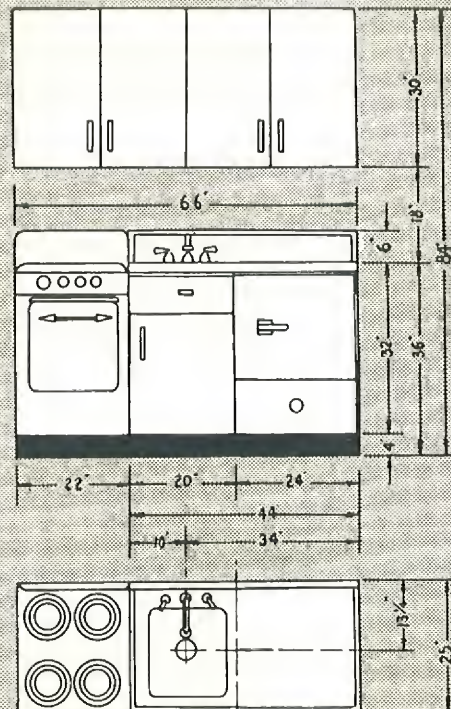



convertibility offers you

9,025 ways to

# *personalize*

a kitchen

All American-Standard undersink and base cabinets can be converted at any time—before or after installation—to provide the specific storage facilities the owner chooses.

This exclusive convertibility feature, with its 9,025 drawer and shelf combinations, is a strong selling point. For it gives your customers the kitchen storage they want, where and when they want it.

And converting American-Standard cabinets is remarkably easy. Removable drawer and shelf guides convert a cabinet with concealed drawers and sliding shelves in a few seconds. To convert a cabinet with a door to one with exposed drawers, just remove the door, snap terne plate guides into place and install the drawers.


Examples of undersink cabinet conversion are shown here and on the following page.

**A.** A 4" deep concealed drawer is added at the top of the cabinet compartment and a concealed sliding shelf at the bottom. The result is easy-to-reach storage space for an electric mixer—with room for appliance accessories.

**B.** Installation of four 4" deep concealed drawers makes this compartment a food storage center. Each drawer holds 15 No. 2 cans—a total of 60 cans. Another possibility; sliding shelves which expose can labels to make selection easier.

**C.** This conversion combination is particularly useful in an undersink cabinet. Two 4" deep concealed drawers keep a supply of fresh dish cloths and towels close at hand. The 9" deep concealed drawer holds bulky items like pans and lids.

**D.** Here's another idea for converting a compartment of an American-Standard sink or base cabinet. Two 9" deep concealed drawers provide lots of storage space for kitchen utensils which won't fit into ordinary cabinet drawers.

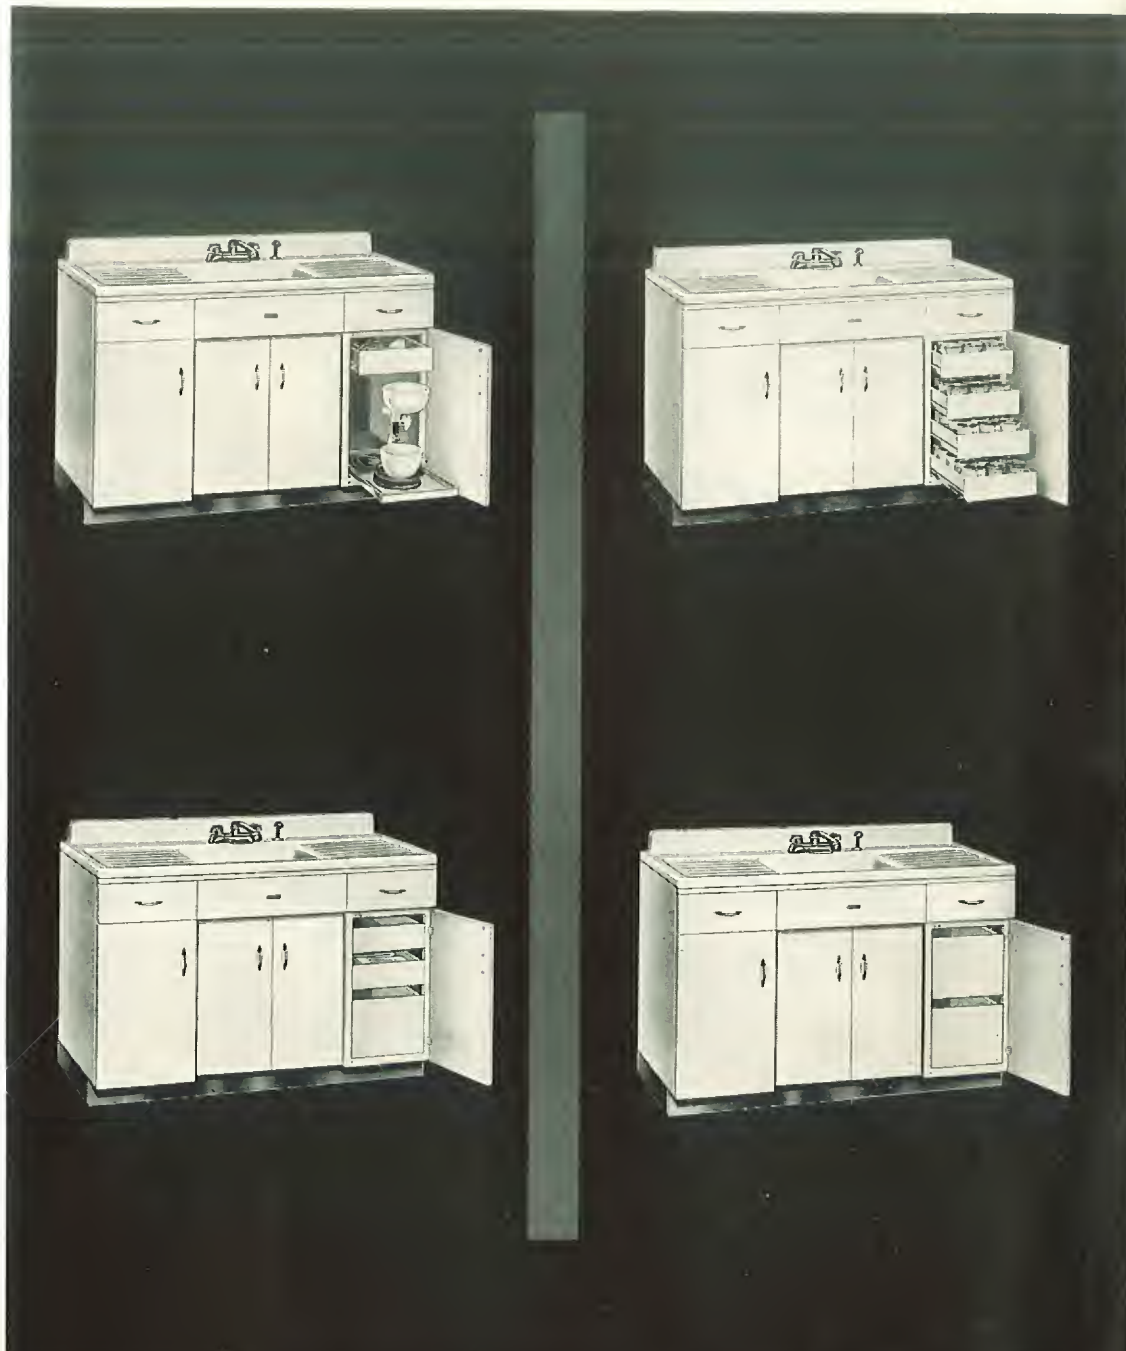



Here is a 54" "Standard" undersink cabinet, with two 6" deep drawers, two single-door compartments, and an undersink compartment with double doors. Below, see how shelves, drawers and accessories convert it—even after installation.



This is now a "Regular" cabinet. A sliding shelf is installed in each end compartment, a cutlery divider and linoleum bottom in one drawer, and a wire utility basket on the left-hand door of the undersink compartment.



Making it a "Deluxe" cabinet, two 12" deep exposed drawers appear in place of the right-hand compartment with door. Other interior arrangements are the same as in the "Regular" cabinet.



Addition of two more drawers on the left-hand side makes a double "Deluxe" cabinet. It has four 12" deep drawers, two 6" deep drawers (one with cutlery divider) and wire utility basket on the left-hand door.



## *Color in the Kitchen*

American-Standard sinks in color add style to the kitchen.

American-Standard enameled cast iron sinks are available in five popular colors in addition to white—Ivoire de Medici, Corallin, Clair de Lune Blue, Ming Green and Persian Brown.

These colors are true and permanent. They will not fade or dull from wear, age or repeated cleaning. Their sparkling beauty lasts and lasts.

American-Standard sinks in color offer great possibilities in kitchen decoration. They come in colors which owners won't grow tired of. And they harmonize with a wide variety of other shades and colors, giving complete freedom in planning or changing kitchen color schemes.

For kitchen sinks of quality construction, smart styling and colorful beauty—look to American-Standard.

# AMERICAN-Standard

## SALES OFFICES

ATLANTA—717-101 Marietta St., N. W., Atlanta 3, Ga.  
BALTIMORE—2315 St. Paul St., Baltimore 18, Md.  
BOSTON—515 Park Square Bldg., Boston 16, Mass.  
BUFFALO—1807 Elmwood Ave., Buffalo 7, N. Y.  
CHICAGO—816 S. Michigan Ave., Chicago 5, Ill.  
CINCINNATI—704 Race St., Cincinnati 2, Ohio  
CLEVELAND—850 Hanna Bldg., Euclid Ave. & E. 14th St., Cleveland 15, O.  
DALLAS—512 Cotton Exchange Bldg., Dallas 1, Texas  
DENVER—720 U. S. National Bank Bldg., 817—17th St., Denver, Colo.  
DETROIT—Suite 1426, Maccabees Bldg., Detroit 2, Mich.  
JACKSONVILLE—203 Hildebrandt Bldg., 306 W. Adams St., Jacksonville, Fla.  
KANSAS CITY—Suite 503, National Fidelity Life Bldg., Kansas City 6, Mo.  
LONG ISLAND—Chamber of Commerce Bldg., 39-01 Main St.,  
Flushing 54, L.I., N. Y.  
LOS ANGELES—Suite 672, Occidental Life Bldg., Los Angeles 15, Calif.  
MILWAUKEE—Suite 1011, Majestic Bldg., Milwaukee 3, Wis.  
MINNEAPOLIS—410 Essex Bldg., Minneapolis, Minn.  
NEWARK—Suite 206, Industrial Office Bldg., Newark 2, N. J.  
NEW ORLEANS—451 The Lee Circle Bldg., 1040 St. Charles Ave.,  
New Orleans 13, La.  
NEW YORK—50 W. 40th St., New York 18, N. Y.  
OMAHA—525 Sunderland Bldg., 403 S. 15th St., Omaha, Neb.  
PHILADELPHIA—Broad St. Station Bldg., Philadelphia 3, Pa.  
PITTSBURGH—501 Bessemer Bldg., Pittsburgh 22, Pa.  
RICHMOND—718 Central National Bank Bldg., Richmond 19, Va.  
ST. LOUIS—905 Continental Bldg., St. Louis 8, Mo.  
SALT LAKE CITY—1108 First Security Bank Bldg., 79 S. Main St.,  
Salt Lake City 1, Utah  
SAN FRANCISCO—Suite 708, Sharon Bldg., San Francisco 5, Calif.  
SEATTLE—816 New World Life Bldg., Seattle 4, Wash.  
SILVER SPRING—Eig Bldg., 8641 Colesville Rd., Silver Spring, Md.



AMERICAN RADIATOR & STANDARD SANITARY CORPORATION

PITTSBURGH 30, PENNSYLVANIA